#### **EXHIBIT A** HIGHTOWER HALL COPPER GUTTER LOCATION DRAWINGS

# EXISTING COPPER PORCH GUTTERS/DOWNSPOUTS TO REMAIN $\angle$

2

0

NEW 5" MINIMUM HALF-ROUND COPPER GUTTERS AT KITCHEN WING

0

.


1.1


. -

- +++


÷


2

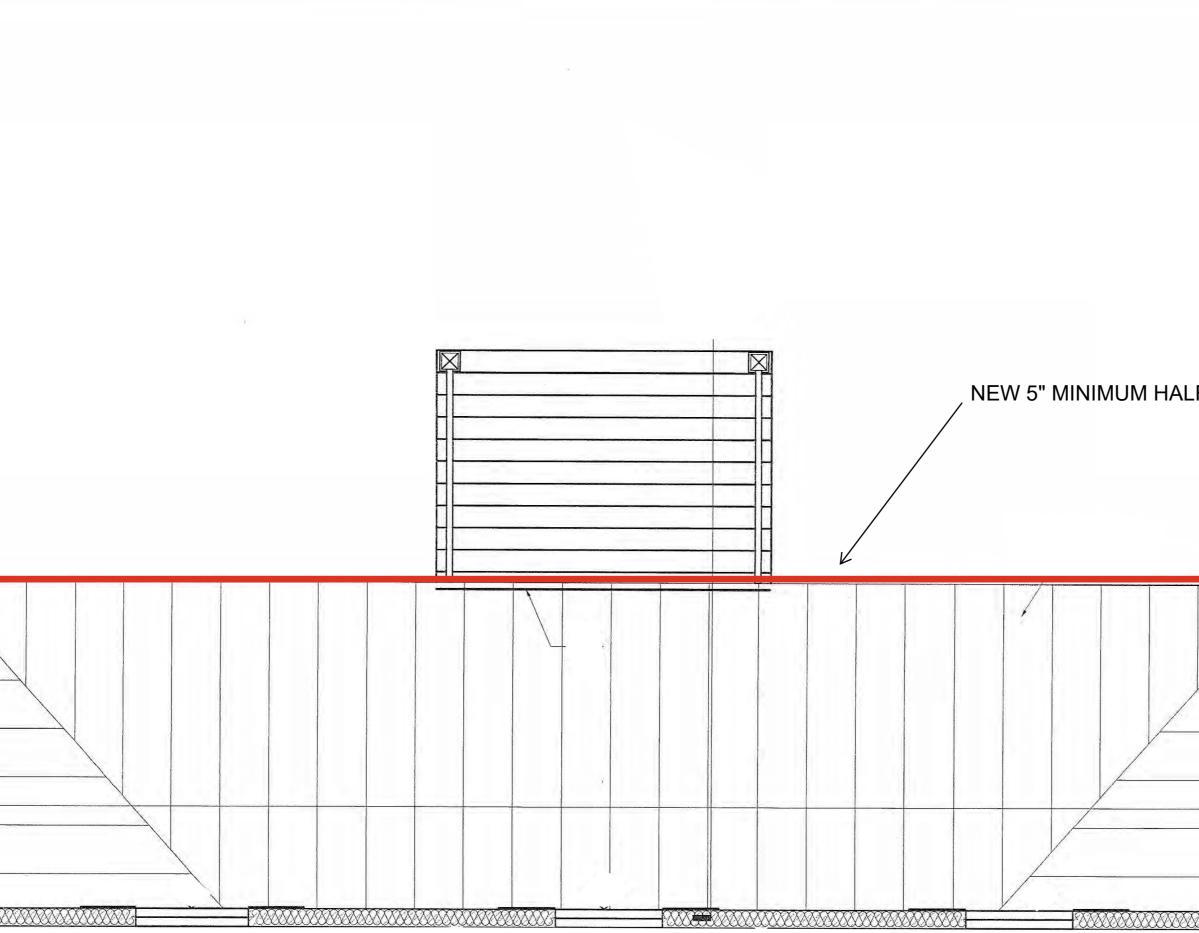

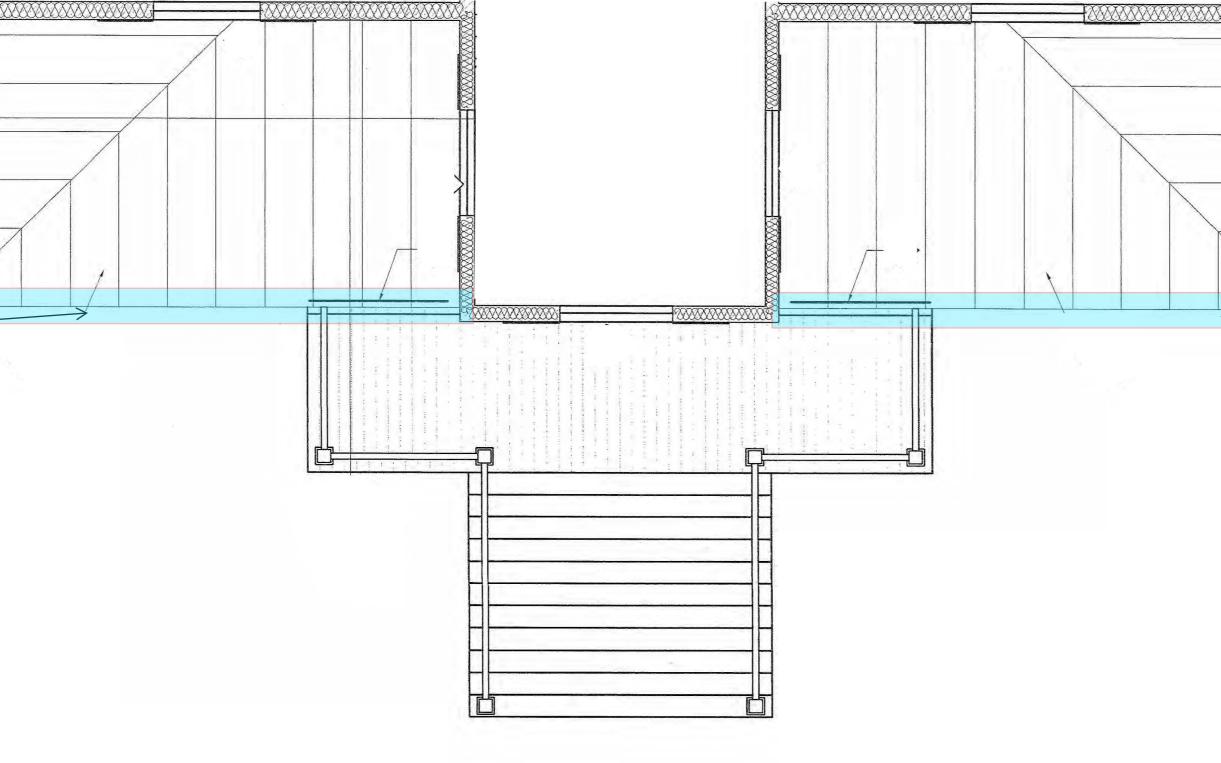

## , NEW 5" MINIMUM HALF-ROUND COPPER GUTTERS AT PORCH ROOR

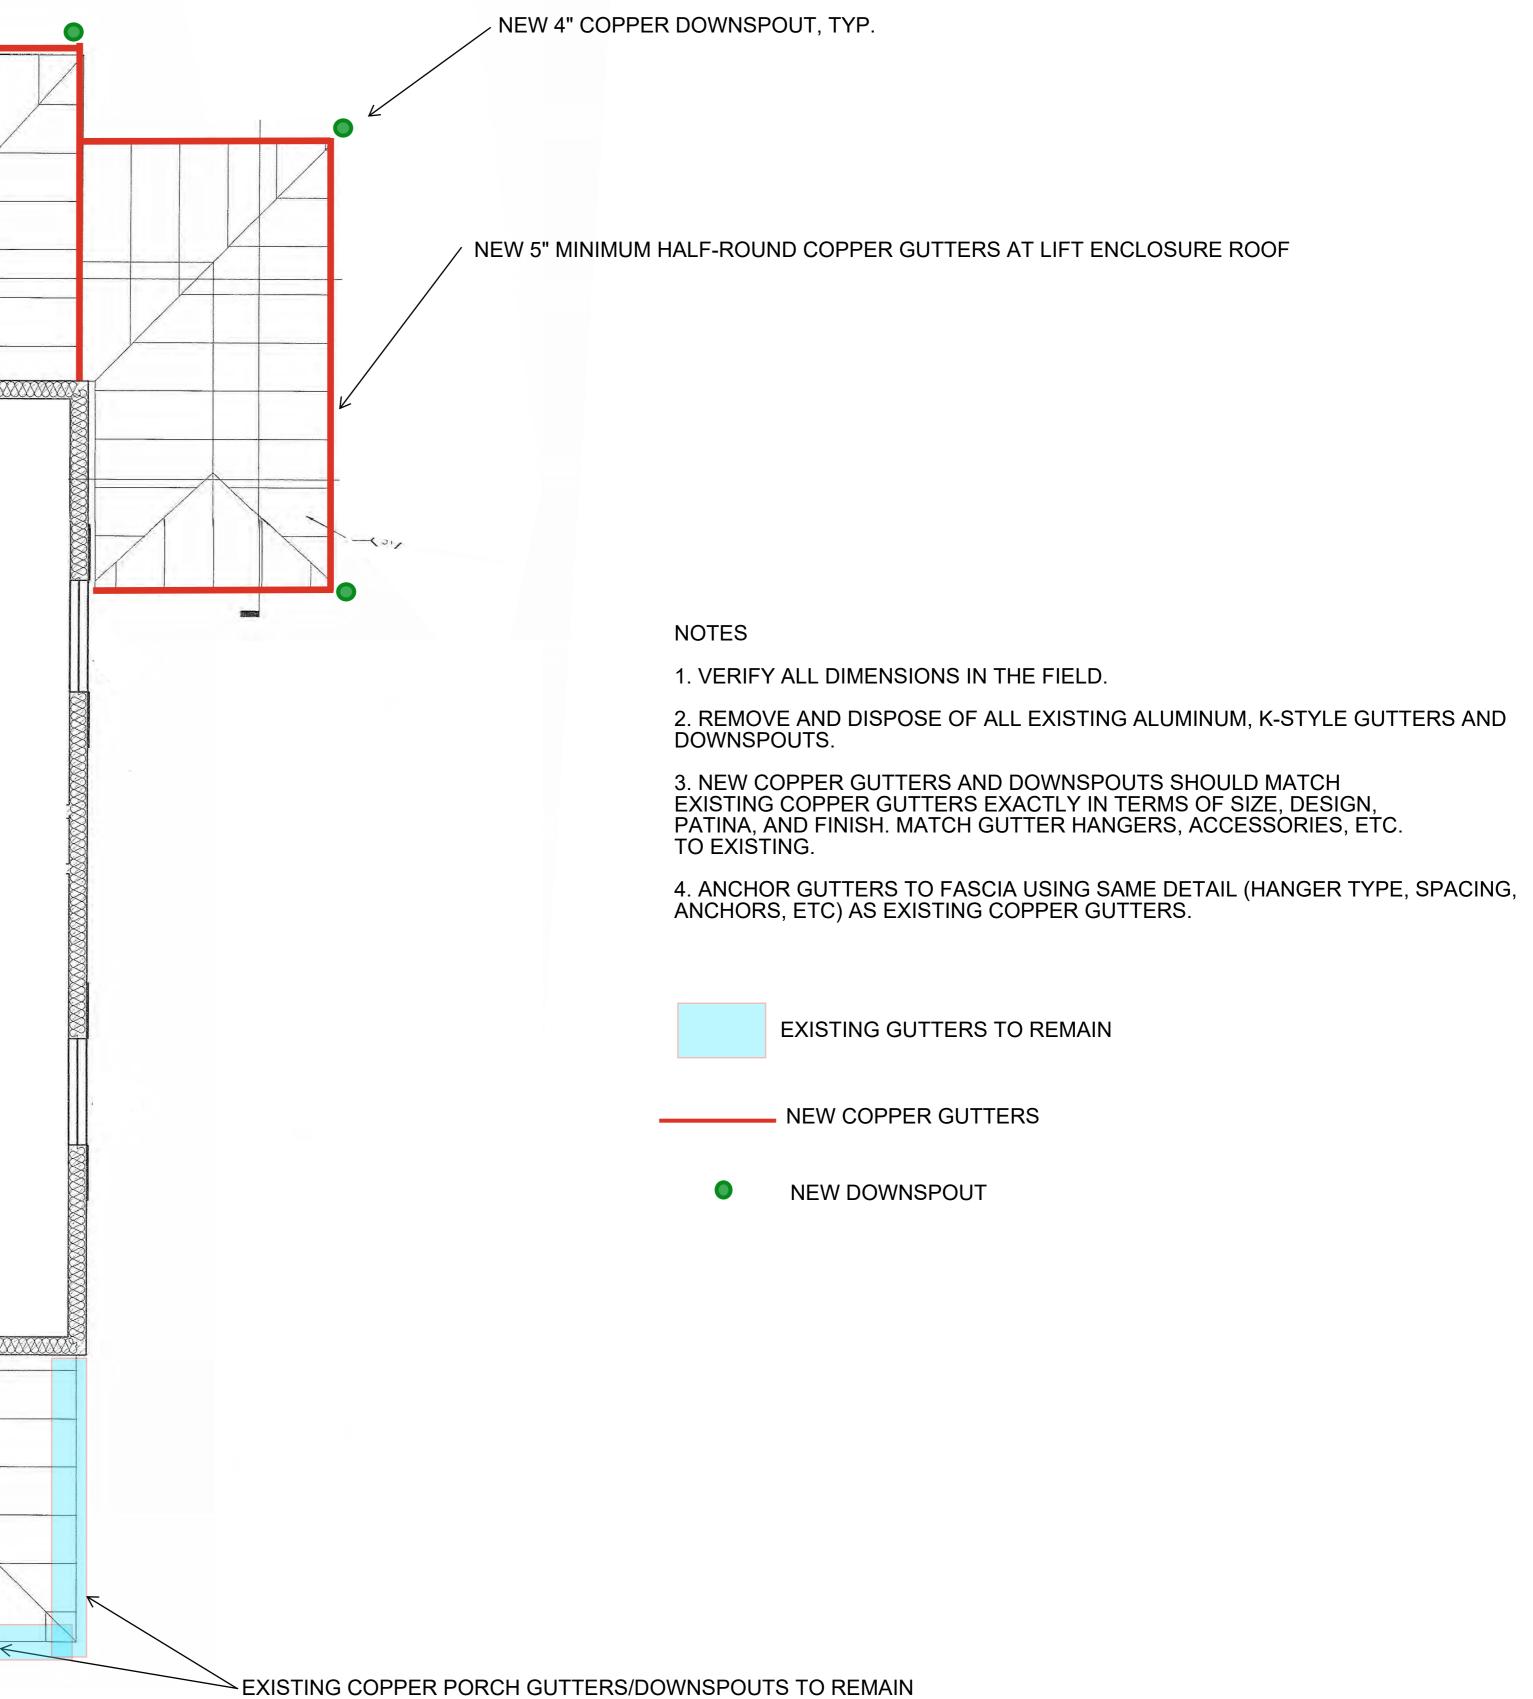

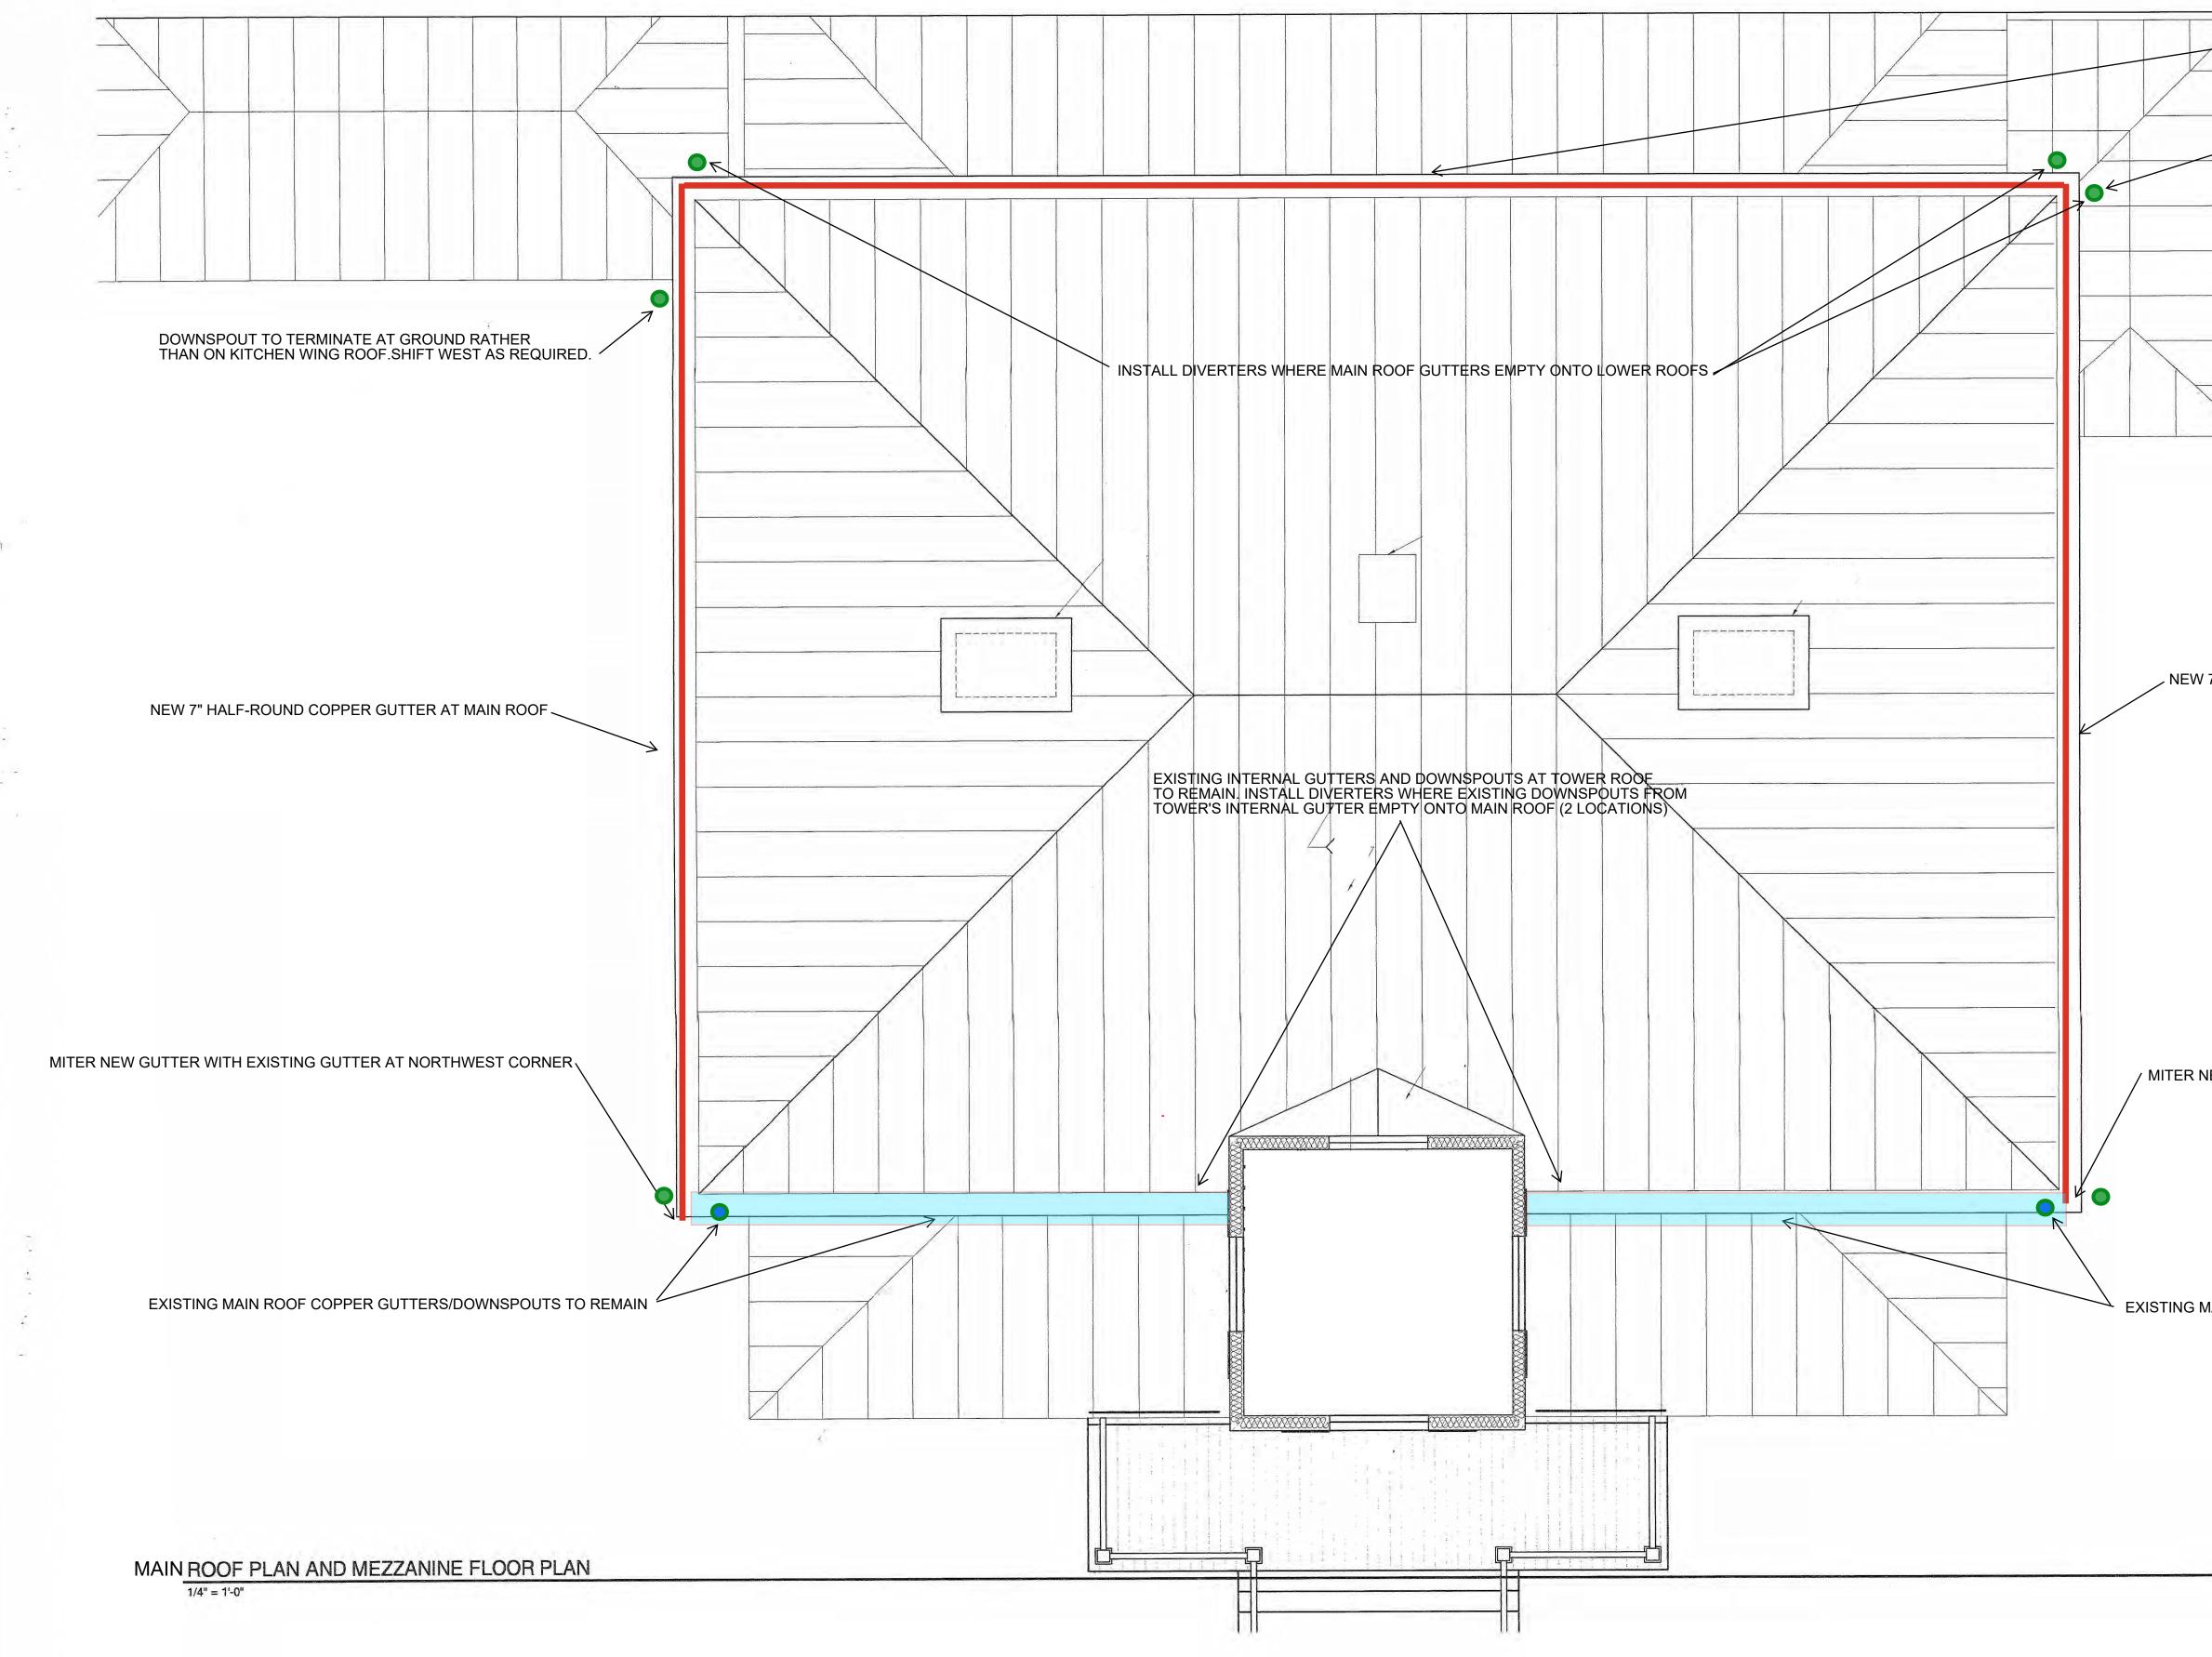

1.87

- -

| 2 | - NEW 7" HALF-ROUND COPPER GUTTERS AT MAIN ROOF |  |
|---|---|--|
|   | NEW 4" COPPER DOWNSPOUT, TYP                    |  |
|   |   |  |
|   |   |  |
|   |   |  |
|   |   |  |
|   |   |  |
|   |   |  |
|   |   |  |

### NEW 7" HALF-ROUND COPPER GUTTERS AT MAIN ROOF

## / MITER NEW GUTTER WITH EXISTING GUTTER AT SOUTHWEST CORNER

## EXISTING MAIN ROOF COPPER GUTTERS/DOWNSPOUTS TO REMAIN

## NOTES

1. VERIFY ALL DIMENSIONS IN THE FIELD.

2. REMOVE AND DISPOSE OF ALL EXISTING ALUMINUM, K-STYLE GUTTERS AND DOWNSPOUTS.

\_\_\_\_\_

3. NEW COPPER GUTTERS AND DOWNSPOUTS SHOULD MATCH EXISTING COPPER GUTTERS EXACTLY IN TERMS OF SIZE, DESIGN, PATINA, AND FINISH. MATCH GUTTER HANGERS, ACCESSORIES, ETC. TO EXISTING.

4. ANCHOR GUTTERS TO FASCIA USING SAME DETAIL (HANGER TYPE, SPACING, ANCHORS, ETC) AS EXISTING COPPER GUTTERS.

|                    | EXISTING GUTTERS TO REMAIN |  |
|--------------------|----------------------------|--|
| NEW COPPER GUTTERS |                            |  |
| ٠                  | NEW DOWNSPOUT              |  |